

# TYREinflate 1000



### Rapid Inflation Time

Inflate the tire to the desired pressure in ca. 2 minutes\*\*



### Wind-up Cable

Winding/unwinding mechanism for a neatly rolled up cable



### LED Light

Easy to operate even in darkness and in low light conditions



### Rapid tyre inflator with wind-up cable

The OSRAM Tyreinflate 1000 is a rapid digital tyre inflator with a backlit digital display for easy, accurate pressure readings. Includes an auto stop feature to get the exact desired pressure needed to accurately inflate your tyres. The auto set on the Tyreinflate 1000 is incredibly easy to set up - just turn the dial to the pressure you require, click to set, then press start. The inflator will automatically stop once the correct pressure has been reached. A wind-up power cable eliminates messy wires and a 2 minute inflation time\* gets you on the road and where you need to be quickly. The power cable is long enough (3.5 m) to reach all tyres around your vehicle. The large on/off button and the LED directional light make the Tyreinflate 1000 easy to use in darkness and emergencies – keeping you prepared for whatever may happen on the road. Includes 3-piece adaptor for bicycles, balls and other inflatables.\*\*based on inflating a 13" tyre from flat to 2.41 BAR

# Product datasheet

## Technical data

### Product information

Inflation time	2 min
Max Pressure	5.5 bar
Air Hose Length	70 cm
Power Cord Length	3.5 m
Display Size	76 x 48 mm
Measuring Units	PSI, kPa, bar
Accuracy (bar)	±0.1 bar
Flow rate (l/min)	tbc


### General Product Information

Global order reference	OTI1000
------------------------	---------

### Electrical Data

Nominal wattage	180.00 W
Nominal voltage	11.1 V
Operating Voltage	12 V
Power Source	12 V Fused Plug

### Physical Attributes & Dimensions

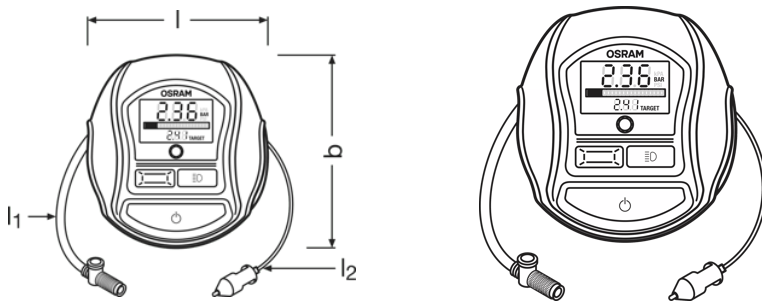

Length	200.0 mm
Width	88.0 mm
Height	219.0 mm

### Operating Conditions

Noise Level (dB)	90 dB
------------------	-------

## Product datasheet

### Additional product data

Display Type	Digital
Recommended to Use With	Car, Small Van, 4X4, Large Van, Trailer

### Capabilities

Accessories	Adaptors for: Balls, Air Mattress, Bikes
Fuse	15 A

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of declaration	28-10-2024
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	166a46e8-51b1-466f-9cfd-6a1cc6989c16 b0abf529-311b-4f43-8c8e-139c08188c8b



ref\_pim\_amsproductinfographic  
S

ref\_pim\_amsproductinfographic  
S












### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899620223	TYRE inflate 1000	Folding carton box 1	232 mm x 95 mm x 216 mm	4.76 dm <sup>3</sup>	1626.00 g
4062172166539	TYRE inflate 1000	Shipping carton box 4	401 mm x 251 mm x 248 mm	24.96 dm <sup>3</sup>	6893.00 g

## Product datasheet

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File	
	User instruction TYREinflate 1000
	Movie application OSRAM TYREinflate 1000 Application Video Short (EN)
	Movie application OSRAM TYREinflate 1000 Application Video Short (DE)
	Movie application TyreInflate How to Video (RU)
	Product movie TyreInflate How to Video (EN)
	Product movie TyreInflate How to Video (IT)
	Product movie TyreInflate 1000 Product Video (RU)
	Product movie TyreInflate 1000 Product Video (EN)
	Product movie TyreInflate 1000 Product Video (ITA)
	Video OSRAM TYREinflate 1000: Rapid tyre inflator with wind-up cable, large digital display and LED light
	Video OSRAM TYREinflate How To: Change your vehicle's tyre pressure easily

#### Safety advice

Product won't exceed noise levels of more than 90 dB

#### Legal advice

CE and EAC compliant

\* for precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

\*\* based on inflating a 13" tyre from flat to 2.41 BAR

Application advice:  
For more detailed application information and graphics please see product datasheet.

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Product datasheet

### Application advice

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.